

Status: 03/2019



Products need labeling
Label printers
with highest operating comfort



eos

Made in Germany

Types

One concept, two sizes

The EOS series combines all functions of a solid label printer with highest operating comfort.

1.1



eos2, the compact one

for label roll diameters up to 152 mm

Label printer		EOS 2	
Printable resolution	dpi	203	300
Print speed	up to mm/s	150	150
Print width	up to mm	108	105.7
Label roll diameter	up to mm	152	152
Power supply		100 - 240 VAC, 50/60 Hz	

1.2



eos5 for large label rolls

with diameters up to 203 mm

Label printer		EOS 5	
Printable resolution	dpi	203	300
Print speed	up to mm/s	150	150
Print width	up to mm	108	105.7
Label roll diameter	up to mm	203	203
Power supply		100 - 240 VAC, 50/60 Hz	

Mobile printing

in production, warehousing or agriculture, wherever labels are required and access to electricity is missing. 24 V input voltage enable the printer to be power supplied by any powerful battery. For technical battery data see accessories

1.3



eos2 mobile

for label roll diameters up to 152 mm

Label printer		EOS 2 mobile	
Printable resolution	dpi	300*	
Print speed	up to mm/s	150	
Print width	up to mm	105.7	
Label roll diameter	up to mm	152	
Power supply		16.5 - 25 VDC	

1.4



eos5 mobile

for label roll diameters up to 203 mm

Label printer		EOS 5 mobile	
Printable resolution	dpi	300*	
Print speed	up to mm/s	150	
Print width	up to mm	105.7	
Label roll diameter	up to mm	203	
Power supply		16.5 - 25 VDC	

*203 dpi on request

Details



1 Roll holder

The label roll is inserted and automatically centered when closing.

2 Ribbon holder

The stop can be adjusted according to the ribbon width.

3 Print head 203 / 300 dpi

In case of cleaning or wear, the print head can be replaced easily by hand without tools.

4 Label sensor - gap or reflective

The sensor position can be adjusted via a spindle using the red rotary knob. The chosen position is indicated by a LED.

5 Print roller DR4

In case of cleaning or wear, the print roller can be replaced without tools.

6 Material guide

Using the rotary knob, the guides can be adjusted to the material width

7 Tear-off plate

made of thin sheet steel; jagged, so labels are cleanly separated

To achieve accurate imprint with slim materials and ribbons, slim print rollers are needed. These prevent from print roller wear, print head contamination and errors during material feed.



Operation panel

Intuitive and easy operation with self-explanatory symbols to configure the device setups

- 1 **LED signal:** Power ON
- 2 **Status bar:** Data reception, Record data stream, Ribbon pre-warning, SD memory card / USB memory stick, Bluetooth, WLAN, Ethernet, USB slave, Time
- 3 **Printer status:** Ready, Pause, Number of printed labels per print job, Label in peel-off position, Awaiting external start signal
- 4 **Buttons** for cutter / perforation cutter: direct cutting
tear-off mode: print the next label
- 5 **USB slot** for the Service Key or a memory stick, to load data in the IFFS storage
- 6 **Operation:**

	Jump to menu		Stop and delete all print jobs
	Reprint last label		Label feed
	Interrupt and continue print job		



Interfaces on the back of the device



- 1 for **SD memory card**
- 2 **2 x USB host** to connect a Service Key, USB memory stick, keyboard, barcode scanner, USB Bluetooth adapter, USB WLAN stick
- 3 **USB 2.0 Hi-speed Device** to connect a PC
- 4 **Ethernet 10/100 BASE-T**
- 5 **RS232C** 1,200 to 230,400 baud/8 bit

Technical data

● typical ■ standard □ option

		1.1		1.2		1.3		1.4	
Label printer		EOS 2		EOS 5		EOS 2 mobile		EOS 5 mobile	
Material feed		centered							
Printing method	Thermal transfer	●		●		●		●	
	Thermal direct	●		●		●		●	
Printable resolution		dpi		203		300		300	
Print speed		up to mm/s		150		150		150	
Print width		up to mm		108		105.7		105.7	
Start of printing		Distance to locating edge		mm		centered			
Material ¹⁾									
Paper, cardboard, plastics PET, PE, PP, PI, PVC, PU, acrylate, Tyvec		●		●		●		●	
Shrink tubes	ready-for-use	●		●		-		-	
	continuous, pressed	●		●		-		-	
Textile tapes		●		●		●		●	
Packing	on rolls, reels	●		●		●		●	
	Fanfold	□		□		-		-	
	Roll diameter	up to mm		152		203		152	
	Core diameter	mm		38.1 - 76					
Winding		outside or inside							
Labels	Width single-lane	mm		10 - 116					
	multi-lane	mm		5 - 116					
	Height excl. label backfeed	from mm		5					
	incl. label backfeed	from mm		12					
Thickness		mm		0.05 - 0.6					
Liner material	Width	mm		25 - 120					
	Thickness	mm		0.05 - 0.16					
Continuous material	Width	mm		5 - 120					
	Thickness	mm		0.05 - 0.5					
	Weight (cardboard)	up to g/m²		180					
Shrink tubes	Width ready-for-use	up to mm		120					
	continuous, pressed	mm		5 - 85					
	Thickness	up to mm		1.1					
Ribbon ²⁾	Ink side	outside or inside							
	Roll diameter	up to mm		72					
	Core diameter	mm		25.4					
	Variable length	up to m		360					
	Width	mm		25 - 114					
Printer sizes and weights									
Width x Height x Depth		mm		253 x 189 x 322		264 x 245 x 412		253 x 189 x 322	
Weight		kg		4		5		4	
Label sensor indicating the position									
Gap sensor		for		labels or punch marks and end of material, print marks on transparant materials					
Reflective sensor		reflex from below or top		for		labels and end of material, print marks on non-transparent materials			
Distance of sensor		from centre to locating edge		centered mm		0 - 58			
Material passage		up to mm		4					
Electronics									
Processor 32 bit clock rate		MHz		800					
Main memory (RAM)		MB		256					
Data memory (IFFS)		MB		50					
Slot to connect a SD memory card (SDHC, SDXC)		up to GB		512					
Battery for time and date, real-time clock				■					
Data memory when power is switched off (e.g. serial numbering)				■					
Interfaces									
RS232C 1,200 to 230,400 baud/8 bit				■					
USB 2.0 Hi-speed device to connect a PC				■					
Ethernet 10/100 BASE-T				LPD, IPv4, RawIP printing, DHCP, HTTP/HTTPS, FTP/FTPS, SMTP, SNMP, TIME, NTP, Zeroconf, SOAP web service, VNC					
1 x USB host on the operation panel		for		Service Key or USB memory stick					
2 x USB host on the back of the device		for		Service Key, USB memory stick, keyboard, barcode scanner, USB Bluetooth adapter, USB WLAN stick, external operation panel					
USB WLAN stick 2.4 GHz 802.11b/g/n				□					
USB WLAN stick 2.4 GHz 802.11b/g/n + 5 GHz 802.11a/n/ac, Hotspot or Infrastructure Mode				□					
USB Bluetooth adapter				□					
Peripheral connection USB host, 24 VDC				■					
Operating data									
Power supply				100 - 240 VAC, 50/60 Hz, PFC				24 VDC	
Power consumption				Standby 1,8 W / typical 45 W					
Temperature / humidity		Operation		+5 - 40°C / 10 - 85 %, not condensing					
		Stock		0 - 60°C / 20 - 85 %, not condensing					
		Transport		-25 - 60°C / 20 - 85 %, not condensing					
Approvals				CE, FCC Class A, ICES-3, cULus, CB, CoC Mexico, CCC, EAC, BIS, BSMI, KC-Mark, RCM					
Operation panel									
Colored LCD touch display		Screen diagonal		"		4.3			
		Resolution Width x Height		px		272 x 480			

¹⁾ The material specifications are standard values. Applications with small labels, very thin, slim, thick and stiff materials as well as strongly adherent labels have to be tested.

²⁾ The ribbon should at least correspond with the width of the liner material.

Technical data

■ standard □ option

Setup options		
	Print Labels Ribbon Tear-off Cut Interfaces Error	Region: - Language - Country - Keyboard - Time zone Time Display: - Brightness - Power saving mode - Orientation Interpreter
Status bar		
	Data reception Record data stream Ribbon pre-warning SD memory card plugged USB memory stick plugged	Bluetooth WLAN Ethernet USB slave Time
Monitoring		
	Ribbon pre-warning End of ribbon End of material	Periphery error Print head voltage Print head temperature Print head open
Test routines		
System diagnostics	on start-up, including print head detection	
Information display, test printout, analysis	Status printout Fonts list List of devices WLAN status	Test grid Label profile List of events Monitor mode
Status reports	- Printout of device settings, e.g. print lengths and service hours - Device status request by software command - Display of, e.g., network errors, no links, barcode errors, periphery errors, etc.	
Fonts		
Font types internally provided	5 bitmap fonts: 12 x 12 dots 16 x 16 dots 16 x 32 dots OCR-A OCR-B	7 vector fonts: AR Heiti Medium GB-Mono CG Triumvirate Condensed Bold Garuda HanWangHeiLight Monospace 821 Swiss 721 Swiss 721 Bold
to be stored	TrueType fonts	
Character sets	Windows-1250 to -1257 DOS 437, 737, 775, 850, 852, 857, 862, 864, 866, 869 EBCDIC 500 ISO 8859-1 to -10 and -13 to -16 WinOEM 720 UTF-8 MacRoman DEC MCS KOI8-R Western European Eastern European Chinese simplified Chinese traditional Thai	Cyrillic Greek Latin Hebrew Arabic
Bitmap fonts	Widths and heights 1 - 3 mm Zoom factors 2 to 10 Orientations 0°, 90°, 180°, 270°	
Vector / TrueType fonts	Size in width and height 0,9 - 128 mm Variable zoom Orientation 360° in steps of 1°	
Font styles	bold, italic, underlined, outline, inverse - depending from the font types	
Character spacing	variable or monospace	

Graphics			
Graphic elements		Lines, arrows, rectangles, circles, ellipses - filled or filled with fading	
Graphic formats		PCX, IMG, BMP, TIF, MAC, GIF, PNG	
Barcodes			
Linear		Code 39, Code 93 Code 39 Full ASCII Code 128 A, B, C EAN 8, 13 EAN/UCC 128/GS1-128 EAN/UPC Appendix 2 EAN/UPC Appendix 5 FIM HIBC	Interleaved 2/5 Ident and routing code of Deutsche Post Codabar JAN 8, 13 MSI Plessey Postnet RSS 14 UPC A, E, E0
2D and stacked		DataMatrix DataMatrix Rectangle Extension QR code Micro QR code GS1 QR code GS1 DataMatrix PDF 417 Micro PDF 417 UPS MaxiCode GS1 DataBar Aztec Codablock F RSS 14 truncated, limited, stacked, stacked omni-directional All codes are variable in terms of height, modular width and ratio; orientations 0°, 90°, 180°, 270° check digit, plain text printout and start / stop code are options depending from the type of code	
Software			
Label software		cablabel S3 Lite cablabel S3 Viewer cablabel S3 Pro cablabel S3 Print	■ ■ □ □
Also running	with	CODESOFT NiceLabel EASYLABEL BarTender	
Stand-alone operation			■
Windows printer drivers WHQL certified	for	Windows Vista Windows 7 Windows 8 Windows 8.1 Windows 10	Server 2008 Server 2008 R2 Server 2012 Server 2012 R2 Server 2016 ■
Apple Mac OS X printer drivers		from version 10.6	■
Linux printer drivers		from CUPS 1.2	■
Programming		JScript printer language abc Basic Compiler	■ ■
Integration		SAP Database Connector	■ ■
Administration		Printer control Configuration in Intranet and Internet Network Manager (in preparation)	■ ■ ■


cab uses free and Open Source Software in its products.
For information see www.cab.de/opensource

Label software cablabel S3

Designing, printing, administrating

cablabel S3 opens up the full potential of cab devices.

First of all, the label must be designed. Only when it comes to printing it has to be decided whether the label shall be processed on a label printer, a print and apply or marker laser system. cablabel S3 is of a modular design which makes it adaptable to requirements step by step. To support functions like native JScript programming, elements such as the JScript Viewer are embedded as plug-ins. The designer user interface and the JScript code are synchronized in real time. Special functions like the Database Connector or barcode testers can be integrated. For further information see www.cab.de/en/cablabel

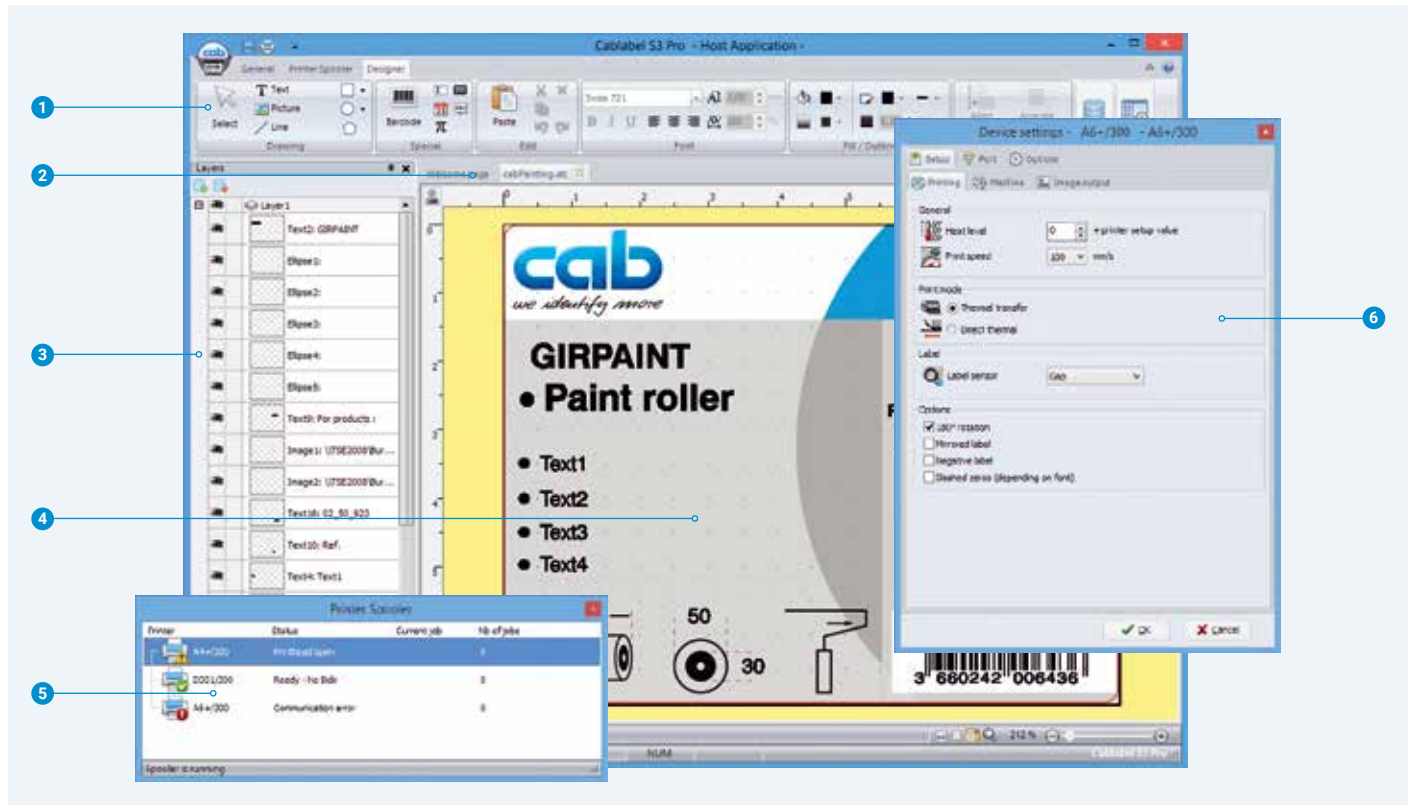

- 1 **Toolbar**
to create different label objects
- 2 **Tabs**
to quickly switch from one running label design to another
- 3 **Layers**
to administrate different label objects
- 4 **Designer**
simplifies the design and displays the label WYSIWYG
- 5 **Printer spooler**
to monitor all print jobs and the state of the printer
- 6 **Drivers**
for setting and the communication with devices

Printing in stand-alone operation

This operating mode is the printer's ability to select and print labels even when it is not connected connected to a host system.

The label has to be designed with a software such as cablabel S3 or by direct programming with a text editor on a PC. Label formats, texts, graphics as well as database contents are stored on a memory card, a USB memory stick or in the internal IFFS memory.

Only variable data are sent to the printer via a keyboard, a barcode scanner, scales or other host systems and/or recalled by the Database Connector from the host and printed.



Printer control

Drivers

To control the printer with a software other than cablabel S3, cab provides drivers in 32 / 64 bit for operating systems starting from Windows Vista, Mac OS 10.6 and Linux with CUPS 1.2.



Windows¹⁾ drivers

cab printer drivers are certified according to WHQL. They ensure optimum stability on the Windows operating system.



Mac OS X²⁾ drivers

cab provides CUPS-based printer drivers for Mac OS X applications.



Linux drivers³⁾

Linux drivers are CUPS-based.

Drivers are offered on the DVD delivered with the printer and for free download at www.cab.de/en/support

Programming



JScript

To control the printer, cab has developed the embedded programming language JScript. See manual for free download at www.cab.de/en/programming



abc Basic Compiler


In addition to JScript and as an integral part of the firmware, it allows advanced printer programming before data are sent to printout. For example, external printer languages can be replaced without interfering in the current print job. Also data from other systems such as a scale, a barcode scanner or PLC can be integrated.

Integration



Printer Vendor Program

As a partner in SAP's⁴⁾ Printer Vendor Program, cab has developed a replace method to enable easy control of a cab printer via SAPScript from SAP R/3. Only variable data are sent to the printer by the host. Pictures and fonts that had priorly been stored in the local memory (IFFS, memory card, etc.) are merged.

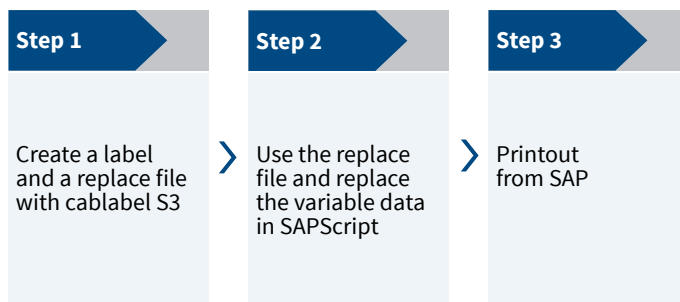

Printer administration




Configuration in Intranet and Internet

The HTTP and FTP server integrated in the printer via standard programs like a web browser or FTP clients allows printer control and configuration, firmware updates and memory card administration. Via email or SNMP, the SNMP and SMTP client datagram sends status, warning and error messages to administrators and users. Time and date are synchronized by a time server.



Network Manager in preparation

It is possible to simultaneously manage several printers within the network. Control, configuration, firmware updates, memory card administration, data synchronization and PIN administration are supported from one single location.

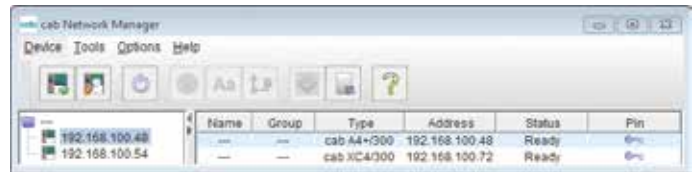

Database Connector

Printers connected to a network may directly access data from a central ODBC or OLEDB-ready database and print it on a label. While printing, data can be rewritten to the database.



¹⁾ Windows is a registered trademark of Microsoft Corporation

²⁾ MAC OS X is a registered trademark of Apple Computer, Inc.

³⁾ Only for device series SQUIX (except of SQUIX MT), MACH 4S, EOS, Hermes+ and PX

⁴⁾ SAP and all corresponding logos are trademarks or registered trademarks of SAP SE

Accessories for all types of devices

2.3		Print roller DR4-25 Material width up to 25 mm; synthetic rubber coating for accurate imprint
		Print roller DR4-50 Material width up to 50 mm; synthetic rubber coating for accurate imprint
2.4		External operation panel providing the same functionality as on the printer
		Users are free to choose whether to operate the printer on the external panel or on the one integrated in the device.
		Printer connection: USB 2.0 Hi-speed device
		Connecting cable USB , length 1,8 m
2.5		Connecting cable USB , length 3 m
		Connecting cable USB , length 5 m

2.6		USB memory stick 8 GB
2.7		USB WLAN stick 2.4 GHz 802.11b/g/n
2.8		USB WLAN stick 2.4 GHz 802.11b/g/n + 5 GHz 802.11a/n/ac in infrastructure mode with rod antenna for extended reach
2.9		USB Bluetooth adapter
2.10		Label selection - I/O box Up to 16 different labels per box can be selected from the memory card by a master control, e.g. PLC. Two boxes can be connected. The I/O box allows simple PLC control processes with four inputs and outputs each via abc programming.
3.1		Connecting cable RS232 C 9/9 pin, length 3 m



Cutter

All printable materials can be cut.

The cutter can be pivoted to exchange the material.

Technical data		Cutter for EOS 2, EOS 5
Material Width	mm	120
Weight cardboard	gr/m ²	60 - 240
Thickness	mm	0.05 - 1.1
Cutting length	from mm	10
Gap height	up to mm	2.5
Cuts/min	up to	200
Label winding		preferably outside
Monitoring		Cutter pivoted, final cutter position has not been reached



Cutter and perforation cutter

Continuous materials such as textiles or shrink tubes
are perforated before they are manually separated.

In addition, the materials can also be cut.

The cutter can be pivoted to exchange the material.

Technical data		Cutter and perforation cutter for EOS 2, EOS 5
Perforating	Web distance mm	2.5
	Web width mm	0.8
Material Width	mm	45
Weight cardboard	gr/m ²	60 - 240
Thickness	mm	0.05 - 1.1
Cutting length	from mm	10
Gap height	up to mm	2.5
Cuts/min	up to	200
Label winding		preferably outside
Monitoring		Cutter pivoted, final cutter position has not been reached

Accessories

5.1




External unwinder

When inserted, the material rolls are automatically centered. The unwinder cannot be installed with EOS mobile.

Technical data		External unwinder for EOS 2, EOS 5
Roll diameter	up to mm	390
Core diameter	from mm	38
Winding		outside or inside
Roll weight	up to kg	4

5.2

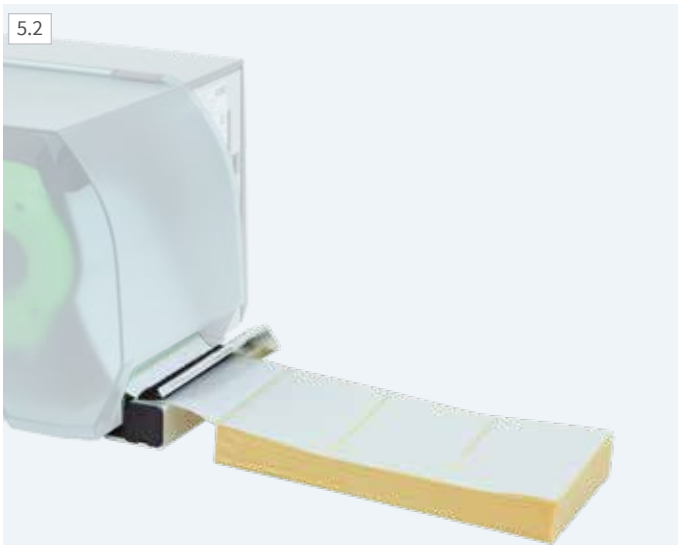

Brake for fanfold labels

for EOS 2 and EOS 5. The fanfold material is tightly fed in the printer and printed precisely. The brake cannot be installed with EOS mobile.

6.1



Battery pack

with a charger unit already included for mobile operation. It is installed under EOS mobile. Per battery capacity, a maximum of 500 print jobs with a label size of 100 x 68 mm and 15 per cent density may be processed.

Technical data		Battery pack 2 for EOS 2, EOS 5
Nominal voltage	V	18
Capacity	Ah	2.1
Power	Wh	36
Charging time	approx. h	2
Charging voltage		100 - 240 VAC, 50/60 Hz


Delivery program

Pos.		Part no.	Printers
1.1		5978201	Label printer EOS 2/200
		5978202	Label printer EOS 2/300
1.2		5978211	Label printer EOS 5/200
		5978212	Label printer EOS 5/300
1.3		5978202.600	Label printer EOS 2 mobile/300
1.4		5978212.600	Label printer EOS 5 mobile/300
Scope of delivery			
DVD	Label printer Power cable Type E+F, length 1.8 m Connecting cable USB, length 1.8 m Operator's manual DE / EN Operator's manual in 30 languages Configuration manual DE / EN / FR Service manual DE / EN Spare parts list DE / EN Programming manual EN WHQL certified Windows printer drivers for Windows Vista Server 2008 Windows 7 Server 2008 R2 Windows 8 Server 2012 Windows 8.1 Server 2012 R2 Windows 10 Server 2016 Apple Mac OS X printer drivers DE / EN / FR Linux printer drivers DE / EN / FR Label software cablabel S3 Lite cablabel S3 Viewer Database Connector		
Pos.		Part no.	Wear parts
2.1		5966096.001	Print head 200 dpi
		5965580.001	Print head 300 dpi
2.2		5965488.001	Print roller DR4
Pos.		Part no.	Accessories
2.3		5966218.001	Print roller DR4-25
		5966219.001	Print roller DR4-50

Scopes of delivery, design and technical specifications correspond to the date of the printing. Subject to change. The data provided in the catalog do not represent any warranty or guarantee.



Information is also available on the Internet:
www.cab.de/en/eos

Pos.		Part no.	Accessories
2.4		6010186	External operation panel
		5907718	Connecting cable USB, 1,8 m
		5907730	Connecting cable USB, 3 m
2.5		5907750	Connecting cable USB, 5 m
2.5		5977370	SD memory card 8 GB
2.6		5977730	USB memory stick 8 GB
2.7		5978912.001	USB WLAN stick 2.4 GHz 802.11b/g/n
2.8		5977731	USB WLAN stick with rod antenna 2.4 GHz 802.11b/g/n + 5 GHz a/n/ac
2.9		5977732	USB Bluetooth adapter
2.10		5948205	Label selection - I/O box
3.1		5550818	Connecting cable RS232 C 9/9 pin, length 3 m
4.1		5965520 5966730	Cutter EOS 2 Cutter EOS 5
4.2		5965910 5969891	Cutter and perforation cutter EOS 2 Cutter and perforation cutter EOS 5
5.1		5965586	External unwinder EOS
5.2		5953753	Brake for fanfold labels EOS
6.1		5542640 5542660	Battery pack 2 EOS 2 Battery pack 2 EOS 5
Pos.		Part no.	Label software
11.7		5588000	cablabel S3 Lite
		5588001	cablabel S3 PRO 1 WS
		5588100	cablabel S3 PRO 5 WS
		5588101	cablabel S3 PRO 10 WS
		5588150	cablabel S3 PRO 1 add. licence
		5588151	cablabel S3 PRO 4 add. licences
		5588152	cablabel S3 PRO 9 add. licences
		5588002	cablabel S3 Print 1 WS
		5588105	cablabel S3 Print 5 WS
		5588106	cablabel S3 Print 10 WS
		5588155	cablabel S3 Print 1 add. licence
		5588156	cablabel S3 Print 4 add. licences
		5588157	cablabel S3 Print 9 add. licences
		in preparation	cablabel S3 Print Server
11.10		9008486	Programming manual EN, printed copy

cab product overview

Label printers MACH1, MACH2
in the lower price segment



Label printers MACH 4S
where little space is available



Label printers EOS2
Desktop device for label rolls
up to diameter 152 mm



Label printers EOS5
Desktop device for label rolls
up to diameter 203 mm



Label printers SQUIX 2
Industrial device for print widths
up to 57 mm



Label printers SQUIX 4
Industrial device for print widths
up to 108 mm



Label printers SQUIX 6
Industrial device for print widths
up to 168 mm



Label printers A8+
Industrial device for print widths
up to 216 mm



Label printers XD4T
for double-sided printing



Label printers XC
for two-color printing



Print and apply systems Hermes+
for automation



Print and apply systems Hermes C
for two-color printing and applying



Print modules PX
to be integrated in labeling machines



Labels
made from more than 400 materials



Ribbons
in wax, resin and resin/wax qualities



Label software cablabel S3
Design, print, control



Label dispensers HS, VS
for horizontal or vertical dispense



Labeling heads IXOR
to be integrated in labeling machines



Marking lasers FL+
with output powers 10 to 50 Watt



Laser marking systems XENO 1
for single workpieces and series



Germany

cab Produkttechnik GmbH & Co KG

Karlsruhe

Phone +49 721 6626 0

www.cab.de

France

cab Technologies S.à.r.l.

Niedermörsen

Phone +33 388 722501

www.cab.de/fr

USA

cab Technology, Inc.

Chelmsford, MA

Phone +1 978 250 8321

www.cab.de/us

Mexico

cab Technology, Inc.

Juárez

Phone +52 656 682 4301

www.cab.de/es

Taiwan

cab Technology Co., Ltd.

Taipei

Phone +886 (02) 8227 3966

www.cab.de/tw

China

cab (Shanghai) Trading Co., Ltd.

Shanghai

Phone +86 (021) 6236 3161

www.cab.de/cn

China

cab (Shanghai) Trading Co., Ltd.

Guangzhou

Phone +86 (020) 2831 7358

www.cab.de/cn

South Africa

cab Technology (Pty) Ltd.

Randburg

Phone +27 11 886 3580

www.cab.de/za

cab // 820 distribution partners in more than 80 countries

